

Rust remover Rost-Off Plus

High-quality rust remover, lubricating effect – owing to the latest additive technology (OMC₂ technology)

High capillary activity

Optimum creeping properties ensure outstanding rust penetration and extensive rust removal

Contains liquid, highly effective, organic molybdenum compound OMC₂

- In contrast to products which contain solid lubricants, such as MOS₂, OMC₂ does not precipitate out in larger containers
- Friction is reduced
- Excellent lubricating effect by smoothing the metal surface
- Ensures permanent smooth running of connections



Corrosion protection additives for optimum protection

Provides lasting protection against further corrosion

Resin and acid-free

Silicone-free

Compatible with rubber and plastic

Chemical basis	Mineral oil
----------------	-------------

Contents	Container	Art. no.	P. Qty.
5 l	Canister	0890 300	1
20 l	Canister	0890 300 1	1
400 ml	Aerosol can	0890 200 004	1/12

Details/Application

For loosening extremely rusty and oxidised threaded assemblies on cars, trucks, agricultural and construction machinery, aggregates, and devices.

can be painted over after the reaction time approx 2 h

Full painting for the surface after 48 h

OMC₂ technology:

From a microscopic standpoint, all metal surfaces are rough and subject to constant wearing and loss of substance when exposed to friction. OMC₂ additives smooth the metal surfaces via a thermoplastic flow deformation by metallorganic connections. The flow deformation is regulated individually, in accordance with the respective loading of the metal surface.

Improved surface quality thanks to metal surface sealant

Improved lubricating film


Reduced thermal loading

Decreased friction (up to 50 % in mixed friction area)

Reduced substance loss

Reduced wear

Longer service life

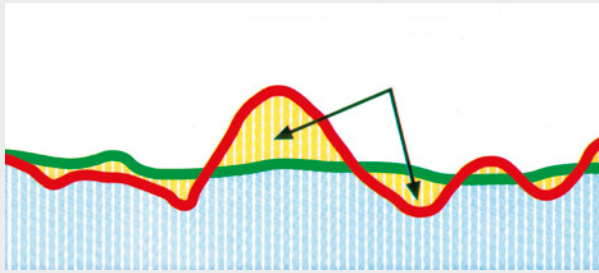

1. Smoothed surface

2. Original surface

3. Areas of plastic smoothing



Instructions

Spray the parts to be treated and allow to work briefly. For stubborn connections, repeat the application process and extend the working time where necessary.

Notice

- Immediately remove excess material or splashes on sensitive and painted surfaces.
- Resin- and acid-free
- Silicone-free

The usage instructions are recommendations based on the tests we have conducted and our experience; carry out your own tests before each application. Due to the large number of applications and storage and processing conditions, we do not assume any liability for a specific application result. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting deliberately. We guarantee consistent quality of our products. We reserve the right to make technical changes and further develop products.

Related products		Art. no.
REFILLO [®] mat filling can		0891 881 2
Related products for	Designation	Art. no.
0890 300	Filling system REFILLO [®]	0891 800 2
	Tap DN 45 thread for 5 l and 10 l plastic canisters	0891 302 01
	Empty container with spray gun Rost Off Plus	0891 502 005
	Compressed-air filling station Refillo [®] combi	0891 800 001
0890 300 1	Filling system REFILLO [®]	0891 800 2
	Empty container with spray gun Rost Off Plus	0891 502 005
	Canister coating ORSY [®] protec	0891 870 77