WÜRTH

AUTOMOTIVE PARTS CATALOGUE



TABLE OF CONTENTS

Wheel Balancing Weights	3 - 5
Automotive Bulbs	5 - 8
Number Plate Holders	9 - 10
Wiper Blades	11 - 12
Jump Starters	12 - 13
Miscellaneous	13 - 15

Zinc-plated steel (FE) counterweights

Universal self-adhesive balance counterweights for rims in light-weight alloy



- Low-profile adhesive bars
- Compliant with the requirements of the EU Directive 2000/53/EC on end-of-life vehicles

Weight of balance weight	60 g
Material	Steel
Surface	Zinc plated

Art. no. 0830 100 560

Proof of performance

Compliant with European Directive 2000/53/EC

Wheel Balancing Weights Alloy Rim Series FN

Precision alloy wheel balancing weights with strong grip, rim protection, and OE-quality performance for vibration-free driving



Material	Steel/steel
Surface	Zinc plated/coated


Weight of balance weight	Art. no.
5.1 g	**0830 100 005**
10 g	**0830 100 010**
15 g	**0830 100 015**
20 g	**0830 100 020**
25 g	**0830 100 025**
30 g	**0830 100 030**
35 g	**0830 100 035**
40 g	**0830 100 040**
45 g	**0830 100 045**
50 g	**0830 100 050**
55 g	**0830 100 055**
60 g	**0830 100 060**

50 pcs

Steel punch bal.wght steel rim powd-coat series P

STEEL PUNCH BALANCING WEIGHT STEEL RIM POWDER COATED SERIES P

Surface	Zinc plated/coated

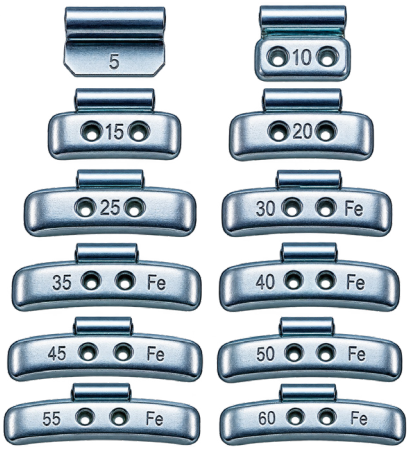

Weight of balance weight	Material	Art. no.	P. Qty. / unit
5 g	Steel/steel	**0830 000 005**	100
10 g	Steel	**0830 000 010**	100
15 g	Steel/steel	**0830 000 015**	100
20 g	Steel/steel	**0830 000 020**	100
25 g	Steel/steel	**0830 000 025**	100
30 g	Steel/steel	**0830 000 030**	100
35 g	Steel/steel	**0830 000 035**	50
40 g	Steel/steel	**0830 000 040**	50
45 g	Steel/steel	**0830 000 045**	50
50 g	Steel/steel	**0830 000 050**	50
55 g	Steel/steel	**0830 000 055**	50
60 g	Steel/steel	**0830 000 060**	50

Turn signal and brake light bulb

Economical veh. bulb 12 volt



Nominal voltage	Power rating	Socket designation	Art. no.	P. Qty. / unit
12 V	5 W	BA15d	**0720 134 212**	10
12 V	5 W	BAY15d	**0720 134 012**	10
12 V	21 W	BA9s	**0720 132 312**	1
12 V	21 W	BAU15s	**0720 132 012**	10
24 V	5 W	BA15d	**0720 134 224**	10

Application

Car

Brake/tail light bulb P21/5W

Economical bulb for light commercial vehicles 24V



Nominal voltage	Power rating	Socket designation	Art. no.	P. Qty. / unit
12 V	21 W	BA15s	**0720 132 212**	10
12 V	21 W	BA15s	**0720 132 224**	10
24 V	5 W	BAY15d	**0720 134 024**	10

Glass socket bulb

Trusted OEM quality for standard applications

Nominal voltage	12 V



Power rating	Socket designation	Art. no.	P. Qty. / unit
1.2 W	W2x4,6d	**0720 160 012**	10
5 W	BAZ15d	**0720 134 112**	10
5 W	W2,1x9,5d	**0720 162 512**	10
5 W	W3x16q	**0720 163 512**	10
16 W	W2,1x9,5d	**0720 162 012**	10
21 W	W3x16d	**0720 163 012**	10

Application

Car

Halogen bulb

Trusted OEM quality for standard applications

- Robust halogen bulb with good performance for standard applications
- Can be used as a standard original equipment part as well as an original spare part



Nominal voltage	Socket designation	Power rating	Art. no.	P. Qty. / unit
12 V	P14,5s	55 W	**0720 111 012**	1
12 V	P22d	51 W	**0720 116 012**	1
12 V	P26.4t	19 W	**0720 118 121**	1
12 V	P29t	45 W	**0720 711 012**	1
12 V	P43t	70 W	**0720 110 724**	1
12 V	PGJ19-2	55 W	**0720 118 412**	1
12 V	PGJ19-2	70 W	**0720 118 424**	1
12 V	PK22s	55 W	**0720 112 012**	1
12 V	PX26d	55 W	**0720 114 012**	1
24 V	P14,5s	70 W	**0720 111 024**	1
24 V	P43t	55 W	**0720 110 712**	1
24 V	PK22s	70 W	**0720 112 024**	1
24 V	PX26d	70 W	**0720 114 024**	1

Application

The halogen bulb is suitable for standard applications in the automotive sector requiring proven OEM quality.

Metal socket bulb

Economical bulb for light commercial vehicles 24V

Nominal voltage	24 V



Power rating	Socket designation	Art. no.	P. Qty. / unit
5 W	BA15s	**0720 140 024**	10
10 W	BA15s	**0720 141 024**	10
21 W	BA9s	**0720 132 324**	1

Application

Light commercial vehicles

Halogen bulb

Proven quality

Nominal voltage	12 V



Socket designation	Power rating	Art. no.	P. Qty. / unit
PGJ13	60 W	**0720 113 012**	1
PGJ19-5	65 W	**0720 118 612**	1
PGJ19-1	35 W	**0720 118 212**	1

Application

Car

Metal socket bulb

Trusted OEM quality for standard applications

Nominal voltage	12 V
Socket designation	BA15s



Power rating	Art. no.	P. Qty. / unit
5 W	**0720 140 012**	10
10 W	**0720 141 012**	10

Application

Car

Parking light bulb

Trusted OEM quality for standard applications

Power rating	4 W
Socket designation	BA9s



Nominal voltage	Art. no.	P. Qty. / unit
12 V	**0720 150 012**	10
24 V	**0720 150 024**	10

Application

Car

Glass socket bulb

Economical bulb for light commercial vehicles 24V

Nominal voltage	24 V
Power rating	5 W
Socket designation	W2,1x9,5d

Art. no. 0720 162 524
P. Qty./unit 10



Number Plate Holders

Number plate holder long


Width	520 mm
Height	110 mm
Material	Polypropylene/polyethylene



Art. no. 0765 000 100
P. Qty./unit 125

Number plate holder short

Width	302 mm
Height	150 mm
Material	Polypropylene/polyethylene

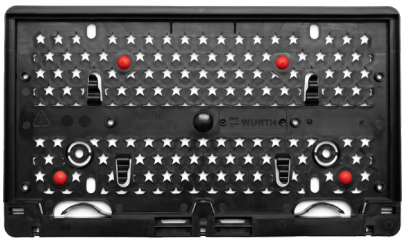

Art. no. 0824 000 600

Number Plate Holder Short W/O Rubber

Number Plate Holder

Height	110 mm
Width	320 mm
Material	Polypropylene/polyethylene
Colour	Black



Art. no. 0824 000 300
P. Qty./unit 125

Proof of performance

ISO 9001:2015 / ISO 14001:2015 / ISO 45001:2018

Number plate holder long

Height	110 mm
Width	520 mm
Material	Polypropylene/polyethylene
Colour	Black



Art. no. 0825 000 300
P. Qty./unit 125

Strip for number plate holder short matte

Material	Polypropylene/polyethylene

Art. no. 0826 500 510



Strip for number plate holder long glossy

Material	PP - Polypropylene

Art. no. 0826 500 511

P. Qty./unit 1



Strip for number plate holder short glossy

Material	PP - Polypropylene

Art. no. 0826 500 500



Strip for number plate holder long matt

Material	PP - Polypropylene

Art. no. 0826 500 512

P. Qty./unit 1



Car Windscreen Wiper Flat blade Multi RedLine

99% universal with 7 adapters and longer life cycle



Length	Art. no.	P. Qty. / unit
350 mm	**0848 111 350**	1
380 mm	**0848 111 380**	1
400 mm	**0848 111 400**	1
450 mm	**0848 111 450**	1
500 mm	**0848 111 500**	1
550 mm	**0848 111 550**	1
600 mm	**0848 111 600**	1
650 mm	**0848 111 650**	1
700 mm	**0848 111 700**	1

Attractive color box packaging with instruction booklet

Wiper blade stand (empty) for 80pcs

Windscreen wiper set with stand 520x300 mm and leaflets



Art. no. 0848 800 606
P. Qty./unit 1

Jump starter, 12/24 V



Professional jump starter for mobile slave starting of vehicles with 12V and 24V electrical system.

- Powerful and user-friendly
- More safety
- Scope of delivery: 1x charger, 1x device/cigarette lighter connection cable, 1x user manual

Suitable for max. cubic capacity	4000 cm^3
Rechargeable battery/battery capacity	46 Ah
Max. current	4400 A
Nominal current	1800 A
Wire cross section	33.6 mm^2
Width x height x depth	355 x 385 x 200 mm
Type of rechargeable battery/battery	AGM battery
Rechargeable battery/battery permanently installed	Yes
Number of rechargeable batteries/batteries	2 PCS
Material of housing	Rubber
Colour	Black
Type description	WPS 1224-900
Display	Digital

Art. no. 0772 955 616

P. Qty./unit 1

Application

Vehicles with diesel/petrol engines and 12V or 24V electrical system.

Jump starter, 12 V



Professional jump starter for mobile slave starting of vehicles with 12V electrical system.

Suitable for max. cubic capacity	3000 cm^3
Rechargeable battery/battery capacity	23 Ah
Max. current	2200 A
Nominal current	900 A
Wire cross section	33.6 mm^2
Width x height x depth	350 x 385 x 120 mm
Type of rechargeable battery/battery	AGM battery
Rechargeable battery/battery permanently installed	Yes
Number of rechargeable batteries/batteries	1 PCS
Material of housing	Special plastic
Colour	Black
Type description	WPS 12-900
Display	Digital

Art. no. 0772 955 617

P. Qty./unit 1

Application

Vehicles with diesel/petrol engines and 12V electrical system.

Removal adapter set R1234YF for 5.6 kg R1234yf reusable refrigerant bottles



- Includes:
  - Seal
  - Valve insert

Product weight (per item)	23 g
Included in delivery	Seal and valve insert

Art. no. 0764 000 812

P. Qty./unit 1

Application

Car air-conditioning unit

LED digital thermometer with contact sensor



Product weight (per item)	137 g

Art. no. 0764 000 013

P. Qty./unit 1



Application

Enables you to measure temperatures in heating, air conditioning and ventilation systems

Exhaust assembly paste



Soft compound for quick, easy and completely gas-tight assembly of sleeve (pipe plug) and flange connectors in exhaust systems.

- No complicated welding required
- Becomes hard as metal due to the exhaust heat
- Temperature resistant up to approx. 800 °C
- Seals permanently
- Insensitive to shock and vibration
- No rust deposits, therefore easy to dismantle


Weight of content	140 g
Colour	Grey
Smell/fragrance	Odourless
Chemical basis	Sodium silicate
Shelf life from production	12 Month

Art. no. 0890 100 045
P. Qty./unit 1/12

Application

Ideally suited for installing or replacing exhaust components and for sealing connection points.

Sound-absorbing plate



Prevents vibration noise in the interior caused by vibrating body parts, such as the wheel arch, cardan tunnel, floor group, doors and other side parts.

- Heavy-duty bitumen plate with polypropylene coating, self-adhesive
- High adhesive strength
- Virtually unbreakable
- Resistant to water, weak acids, alkaline solutions, etc.
- Temperature resistant –30°C to +80°C (1 hour at +180°C)

Length x width x thickness	550 x 250 x 2 mm
Number of pieces	6 PCS
Colour	Light grey (bright grey)

Art. no. 0890 100 060
P. Qty./unit 1

Application

Prevents vibration noise in the interior caused by vibrating body parts, such as the wheel arch, cardan tunnel, floor group, doors and other side parts.

Self-adhesive fusible layer

For repair work, sound insulation and sound deadening on car floor panels



- Protects the car interior from vibration noises and airborne noise
- Very good plasticity once heated
- Use on panels with severe deformation, surface embossing or beading
- 1 packaging unit covers 4 panels

Length x width x thickness	1000 x 500 x 2.8 mm
Number of pieces	4 PCS
Colour	Black (base material)

Art. no. 0890 100 070

P. Qty./unit 1

Application

The self-adhesive insulation panel is used for sound deadening and for softening structure-borne noise when applied to thin panelling such as in construction, e.g. on façade panels, aluminium window sills, ventilation ducts, in mechanical engineering, vehicle and plant construction. Do not directly expose the product to the elements.



WÜRTH

CUSTOMER HAPPINESS CENTER
800 WURTH (98784)

AUTOMOTIVE PARTS CATALOGUE

Würth Gulf FZE
P.O.Box: 17036 Jebel Ali South 6,
Dubai, United Arab Emirates.
T. 800 WURTH (98784)
customerhappinesscenter@wurth.ae
eshop.wurth.ae