WÜRTH

CORDED AND CORDLESS POWER TOOLS CATALOGUE



TABLE OF CONTENTS

Corded Power tools	3 – 15
Cordless Power tools	16 – 19

Tapping and chipping hammer BMH 32-XE

Robust hammer drill and chipping hammer with SDS-plus drive arbour for drilling diameters up to 32 mm in concrete


- Anti-vibration system
- Short drilling times with high impact power
- Chisel function with 4.2 joule individual impact strength
- 24 lockable chisel settings



Nominal voltage	230 V/AC
Power input	900 W
Min./max. idle speed	0-760 rpm
Min./max. impact rate	0-3600 rpm
Impact energy	4.2 J
Tool holding device	Suitable for SDS-plus
Min./max. drilling diameter in concrete	6-32 mm
Weight of machine	4.7 kg
Cable length	4 m

Art. no. 0702 543 2

P. Qty./unit 1



Case in 8.4.2 format compatible with many other Würth system cases.

Application



Tapping and chipping hammer BMH 40 BASIC

Hammer drill and chipping hammer with SDS-max drive arbor, die-cast magnesium transmission housing and anti-vibration mechanism for comfortable working

- Integrated damping system for vibration reduction
- LED display for timely indication of a carbon brush change
- Switch lock for continuous work



Nominal voltage	230 V/AC
Power input	1100 W
Min./max. idle speed	350-540 1/min
Min./max. impact rate	0-3000 1/min
Impact energy	8.5 J
Tool holding device	Suitable for SDS-max
Min./max. drilling diameter in concrete	12-40 mm
Weight of machine	7.1 kg
Cable length	6 m

Art. no. 0702 551 1

P. Qty./unit 1



Application

- Rotary hammer drilling in concrete, masonry and natural stone
- Light to medium-weight chiselling in concrete and masonry
- Through-hole drilling with hammer drill bits mainly in masonry

Tapping and chipping hammer BMH 45-XE

Powerful and anti-vibration 8-kg hammer drill/chipping hammer with SDS-max drive arbour.



- Automatic switch lock enables comfortable working during longer periods of chiselling work
- Drilling and impact power can be easily reduced or increased by turning the electronic adjusting wheel
- Service LED indicates any faults or upcoming carbon brush replacement

Nominal voltage	230 V/AC
Power input	1500 W
Min./max. idle speed	0-305 rpm
Min./max. impact rate	1380-2760 rpm
Impact energy	12.5 J
Tool holding device	Suitable for SDS-max
Min./max. drilling diameter in concrete	12-45 mm
Weight of machine	8.9 kg
Cable length	4 m

Art. no. 0702 557 1
P. Qty./unit 1

Chipping hammer MH 11-XE

Powerful and anti-vibration 11-kg chipping hammer with SDS-max drive arbor.



- Electronic adjusting wheel
- 12 lockable chisel settings
- Quiet-running and powerful with anti-vibration system
- Indication of malfunctions by service LED

Nominal voltage	230 V/AC
Power input	1700 W
Min./max. impact rate	900-1700 rpm
Impact energy	23 J
Tool holding device	Suitable for SDS-max
Weight of machine	11.4 kg
Cable length	4 m

Art. no. 0702 572 1
P. Qty./unit 1

Chipping hammer MH 16-XE

For the toughest applications, e.g. breakthrough and demolition work, in a practical rolling case for easy transport



- Active vibration damping
- Power for 13-ton daily removal capacity
- Large hammer mechanism
- Robust housing

Nominal voltage	230 V/AC
Power input	1750 W
Min./max. impact rate	0-1300 rpm
Impact energy	41 J
Tool holding device	Hexagon socket 30 mm
Weight of machine	16.5 kg
Cable length	4 m

Art. no. 0702 575 1

P. Qty./unit 1





The high impact force of 41 joules also causes heavy vibrations. However, for the most part these are buffered by the spring-mounted handle.





The practical wheels on the master machine case enable simple transport despite the high weight.

Core drill DS 350

Diamond core drill for stand-guided wet and dry drilling in concrete, reinforced concrete and masonry

- Drill-stand-guided wet and dry drilling possible
- Multi-colour LED load indicator for perfect drilling progress
- Soft start function for clean spot drilling

Nominal voltage	230 V/AC
Power input	3200 W
Nominal voltage	230 V/AC
Power input	3200 W
Min./max. drill hole diameter	25-350 mm
Weight of machine	13.5 kg
Length	580 mm
Width	165 mm
Height	185 mm
Idle speed 2nd gear max.	818 rpm



Art. no. 5709 116 03
P. Qty./unit 1







Application

- Drill-stand-guided wet drilling in reinforced and non-reinforced concrete both on ceilings, walls and floors
- Drill-stand-guided dry drilling in clay bricks, perforated bricks, clinker bricks, sand-lime bricks and aerated concrete both on ceilings, walls and floors
- Openings for house connections
- Ducts for pipes, cables and electrical lines
- Ventilation openings and perforated holes

Drilling stand DS Compact



Compact drilling stand for diamond core drills DS 180


- Knurled thumb screws make for easy alignment of the drilling stand
- Dovetail guide ensures precise drilling
- Floor mounting enables drilling a wall

Column height	725 mm

Art. no. 5709 116 11

P. Qty./unit 1



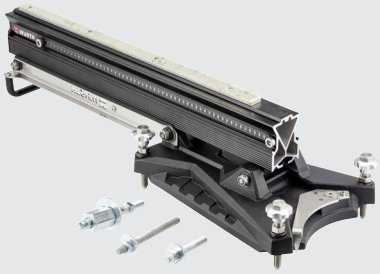



1 Female thread for stamping device
2 Aluminium column with swan neck guide and carrying handle
3 Drilling spindle with quick-change connection, can be mounted on both sides on slide, with integrated key for knurled thumb screws
4 Engraved drill angle display (up to max. 45°)
5 Engraved drill depth display





Application

Suitable for use in the DS 180 diamond core drill



Drilling stand DS Comfort



Compact drilling stand for diamond core drills DS 180 and DS 300

- Knurled thumb screws make for easy alignment of the drilling stand
- Dovetail guide ensures precise drilling
- Floor mounting enables drilling a wall

Column height	900 mm

Art. no. 5709 116 12
P. Qty./unit 1






Application



Extension for 1 1/4 inch core drill bit

From drill crown diameter 50 mm



Thread type of drill spindle	1 1/4 inch
Length	500 mm

Art. no. 5462 010 030
P. Qty./unit 1

Magnetic core drill MKB 35

Compact and powerful electromagnetic core drill for bore holes up to 35 mm in diameter, including safety belt, coolant tank and hexagon key.



- Secure attachment to metallic workpieces with the electromagnet
- The machine is suitable for tough construction site conditions and its low tare weight makes it easy to transport.
- 5-metre PUR network cable is flexible at low temperatures, protected against external influences and highly robust.
- With the pre-mounted star handle, the machine can be used immediately.

Tool holding device	Weldon
Min./max. drill diameter	12-35 mm
Cutting depth	50 mm
Lift height	120 mm
Rotation speed at nominal load in 1st gear	450 rpm
Magnetic force	9000 N
Power input	1100 W
Weight of machine	10 kg

Art. no. 5709 200 1

P. Qty./unit 1



Angle grinder EWS 10-115 Classic 220V

Compact 1010W angle grinder with ideal balance of power and ergonomics. Ideal for light to medium duty grinding and cutting work, such as deburring

Nominal voltage	230 V
Power input	1010 W
Max. idle speed	12000 rpm
Max. cutting disc diameter.	115 mm
Thread type x spindle-thread diameter	M14
Weight of machine	2.3 kg
Cable length	2.5 m



Art. no. 5717 042 030
P. Qty./unit 1

Two-hand angle grinder EAG 20-230

Extremely powerful angle grinder 2000 W for discs with a maximum diameter of 230 mm

Nominal voltage	230 V/AC
Power input	2000 W
Max. idle speed	6500 rpm
Max. cutting disc diameter.	230 mm
Thread type x spindle-thread diameter	M14
Weight of machine	4.3 kg
Cable length	4 m



Art. no. 5717 008 030
P. Qty./unit 1

Miter saw MMS 2300

Metal miter saw for cutting steel, plastic, aluminum, copper, cast metal, and stainless steel. With carrying handle – lightweight and can be used anywhere.

Nominal voltage	230 V/AC
Frequency	50 Hz
Protection class	Protection class II/protective insulation
Max. saw-blade diameter	355 mm
Suitable for bore diameter	25.4 mm
Power input	2300 W
Max. mitre angle	45 Degree
Weight of machine	16.3 kg
Cable length	2.5 m
Max. idle speed	3800 rpm
Length	450 mm
Width	255 mm
Height	415 mm



Art. no. 5717 013 110

P. Qty./unit 1

Hand-held Circular Saw ECS 1100

1100 Watt hand-held circular saw with cutting depth of 67 mm.

Nominal voltage	230 V/AC
Power input	1100 W
Max. saw-blade diameter	190 mm
Suitable for bore diameter	20 mm
Weight of machine	3.6 kg
Cable length	2.5 m



Art. no. 5717 020 030

P. Qty./unit 1

Impact drill ESB 65-13K Classic

Powerful, compact and lightweight 650W impact drill with quick metal chuck up to 13mm. Fast drilling and long service life



Nominal voltage	230 V/AC
Power input	650 W
Idle speed 1st/2nd gear min./max.	0-2800/0-0 rpm
Min./max. drill chuck span width	1-13 mm
Cable length	2 m

Art. no. 5717 031 131



Hammer drill H 8-28-Classic

Light hammer drill with outstanding impact energy for light drilling, hammering and chiselling in construction.



Nominal voltage	230 V/AC
Frequency	50 Hz
Power input	800 W
Min./max. impact rate	0-4000 rpm
Impact energy	3.2 J
Min./max. recommended drilling range for optimum performance (in concrete)	10-16 mm
Weight of machine	2.9 kg
Cable length	2 m
Protection class	Protection class II/protective insulation

Art. no. 5717 026 151

P. Qty./unit 1

Oscillating jigsaw STP 65 Classic

Extremely powerful battery-powered impact wrench with high torque.
Suitable for screwdriver diameters up to max. M22

Nominal voltage	230 mV/AC
Power input	550 W
Min./max. idle stroke speed	800-2700 rpm
Stroke length	20 mm
Max. cutting depth in wood	65 mm
Weight of machine	2.4 kg



Art. no. 5717 064 150
P. Qty./unit 1

Polishing machine EPM 2000-7

Very powerful rotary polishing machine with additional D-handle for more convenient and comfortable operation.

Nominal voltage	220 V/AC
Power input	1200 W
Min./max. idle speed	800-2400 rpm
Thread type x spindle-thread diameter	M14
Weight of machine	3.4 kg
Cable length	2 m



Art. no. 5717 010 030
P. Qty./unit 1

Application

Designed for a wide range of polishing and sanding applications, and is ideal for automotive and marine detailing as well as stone polishing work (dry application only).

Hot air blower HLG 2300-E POWER



Handy, lightweight device with continuous temperature and air flow regulation. Additional LCD display with memory function

- Frequently used settings can be saved using the LCD display
- The temperature is set in 5°C steps and the air flow is adjusted in 5 stages, thus allowing simple temperature and air flow control
- The lightweight and ergonomic design means that even longer tasks can be carried out with little fatigue

Nominal voltage	230 V/AC
Frequency	50 Hz
Power input	2300 W
Min./max. blower temperature	80 to 650 °C
Min./max. air current	200-550 l/min
Weight of machine	750 g
Cable length	5 m

Art. no. 5707 252 1

P. Qty./unit 1



Application

Soldering and welding, plastic welding, gluing, removing paints, heating and forming plastic; welding bitumen; strong bead welding, sealing holes with welding additive, removing labels, keder welding, overlapping welding, removing adhesive, lens tinting (cleaning, drying, applying film), heat-shrink tubing, heat-shrink fabric, film wrapping

REDSTRIPE Cordless drill driver ABSR 12 Compact

The 12V Drill Driver (40 Nm) is a compact yet powerful cordless tool designed for professional use in assembly, installation, and service tasks. It features a high-performance brushless motor and adjustable torque settings, delivering up to 40 Nm of torque. This allows for precise screwdriving and reliable drilling in wood, metal, and plastic materials



Nominal voltage	12 V/DC
Min./max. drill chuck span width	1-10 mm
Weight of machine with rechargeable battery	1 kg
Included in delivery	1x ABSR 12 COMPACT (Bare tool) 1x TLBTRY-LIION-12V/2.0AH-REDSTRIPE 2xCHRG-(ALGR 12/1.5 REDSTRIPE)-PLG/G

Art. no. 5702 510 032
P. Qty./unit 1

REDSTRIPE Cordless drill driver ABSR 20 Combi

The Drill Driver is the latest generation hammer drill with powerful performance in an ultra compact size and ultra light weight. It features a heavy-duty 13mm metal chuck, a variable two-speed setting, a maximum 60Nm of torque at 33,600 impacts per minute and 20+1+1 clutch positions. ABSR 20 COMBI is ideal for accessing tight corners. It is suitable for drilling into wood, metal, plastics, and other screw-driving tasks, while its ergonomic design provides better control.

- Powerful screwing and fastening
- Drilling in hard materials
- Professional assembly and construction
- Maintenance and repair



Nominal voltage	20 V/DC
Max. impact rate	33600 BPM
Weight of machine with rechargeable battery	1.4 kg
Included in delivery	1X ABSR 20 COMBI (Bare tool) 2X TLBTRY-LIION-20V/2.0AH-REDSTRIPE 1X CHRG-(ALGR 20/2 REDSTRIPE)-PLG/G

Art. no. 5702 512 132
P. Qty./unit 1

REDSTRIPE Impact wrench ASSR 20 - 1/2 Power

High-performance 20V cordless impact wrench designed for demanding fastening tasks. It features a brushless motor for improved efficiency and durability. The compact design ensures easy maneuverability in tight spaces, making it perfect for automotive, construction, and heavy-duty maintenance applications.



Type description	ASSR 20-1/2IN POWER
Min./max. idle speed	0-2900 1/min
Min./max. impact rate	0-3300 BPM
Suitable for screw	1/2 inch
Tool holding device	1/2-inch external square
Weight of machine with rechargeable battery	2 kg
Included in delivery	1X ASSR 20-1/2IN POWER (Bare tool) 2X TLBTRY-LIION-20V/4.0AH-REDSTRIPE 1X CHRG-(ALGR 20/6 REDSTRIPE)-PLG/G

Art. no. 5702 517 032
P. Qty./unit 1

REDSTRIPE Cordless angle grinder AWSR 20-115 Compact

Designed for precision cutting and grinding in metal, stone, and masonry. Its compact, lightweight design ensures better control and reduced fatigue, while the brushless motor technology delivers longer runtime and extended tool life. With three speed settings and built-in safety features, it provides versatile performance without compromising user safety



Max. idle speed	9500 1/min
Nominal voltage	20 V/DC
Max. cutting disc diameter.	115 mm
Weight of machine without rechargeable battery	1.2 kg
Included in delivery	1X AWSR 20-115 COMPACT (Bare tool) 2X TLBTRY-LIION-20V/4.0AH-REDSTRIPE 1X CHRG-(ALGR 20/4 REDSTRIPE)-PLG/G
Rechargeable battery/ battery capacity	4 Ah
Number of rechargeable batteries/batteries	2 PCS

Art. no. 5702 519 032
P. Qty./unit 1

REDSTRIPE Cordless rotary hammer ABHR 20 Power

This rotary hammer is a powerful and durable tool designed for intensive drilling and chiseling in tough materials. It is engineered for professionals who require high performance and longevity, combining strength, safety, and ease of use into one robust instrument. This tool ensures consistent power delivery and has an extended service life, even in demanding environments. It is ideal for structural, renovation, and construction projects where reliability is essential.



Nominal voltage	20 V/DC
Min./max. idle speed	0-1300 1/min
Min./max. impact rate	0-5500 BPM
Impact energy	2.8 J
Tool holding device	Suitable for SDS-plus
Weight of machine with rechargeable battery	3.3 kg
Included in delivery	1X ABHR 20 POWER (Bare tool) 2X TLBTRY-LIION-20V/4.0AH-REDSTRIPE 1X CHRG-(ALGR 20/4 REDSTRIPE)-PLG/G

Art. no. 5702 522 032
P. Qty./unit 1

REDSTRIPE Li-ion battery 20V

The Lithium-Ion battery series delivers consistent power, extended runtime, and long life for professional cordless tools. Designed with advanced cell technology and intelligent protection, these batteries ensure reliable performance in demanding environments. Compatible exclusively with all WÜRTH REDSTRIPE cordless tools, they provide stable power output for drilling, grinding, fastening, and cutting applications.



Nominal voltage	18 V/DC

Rechargeable battery/battery capacity	Product weight (per item)	Art. no.	P. Qty. / unit
2 Ah	400 g	**5702 801 023**	1
4 Ah	650 g	**5702 801 043**	1

REDSTRIPE Battery charger 20V ALGR 20V

Designed for fast, safe, and efficient charging of all compatible RED-STRIPE batteries. Equipped with smart charging technology, they maximize battery life while providing user-friendly operation



Type description	ALGR 20/4 REDSTRIPE
Suitable batteries	LI 20 Volt
Max. charging current	4 A
Cable length	1.2 m
Min./max. frequency	50/60 Hz

Art. no. 5702 903 043

P. Qty./unit 1



WÜRTH

CUSTOMER HAPPINESS CENTER
800 WURTH (98784)

POWER TOOLS CATALOGUE

Würth Gulf FZE
P.O.Box: 17036 Jebel Ali South 6,
Dubai, United Arab Emirates.
T. 800 WURTH (98784)
customerhappinesscenter@wurth.ae
eshop.wurth.ae